


SUBWOOFER SPEAKER



OWNER'S MANUAL

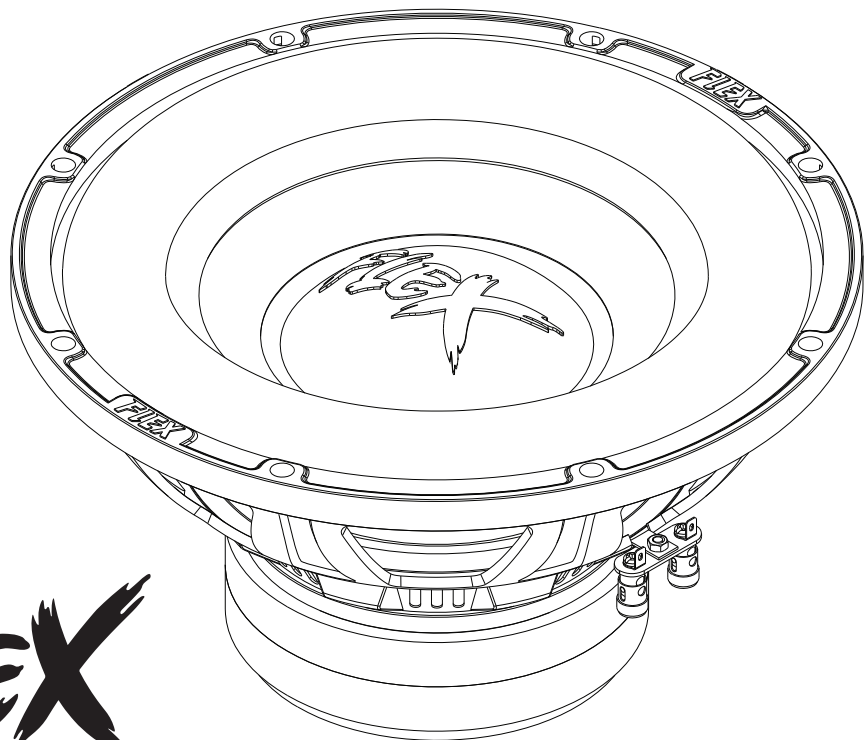

FLEX
AUDIO

SERIES

FX-12 800

1.SPECIFICATIONS


Model	FX-12 800 D2/D4
size (inch)	12
Surround material	Foam
Cone material	Pressed paper
Frame material	Stamped steel
Magnet type	Ferrite
Power RMS (Watt)	800
Power MAX (Watt)	1600
Voice coil size (inch)	2.5
Voice coil wire	CCAW

THIELE-SMALL PARAMETERS

Impedance (ohm)	2+2/4+4
Re (ohm)	1.8+1.8/3.6+3.6
SPL (dB)	88/88
Xmax(mm)	14
Fs (Hz)	35/38
Vas (L)	36.5/34.3
Qts	0.49/0.51
BL	18.5/21.5

This specified sensitivity is not directly connected with the sound pressure in the vehicle, and therefore should not be used as the sole indicator for comparison with other speakers.

FX-12 800

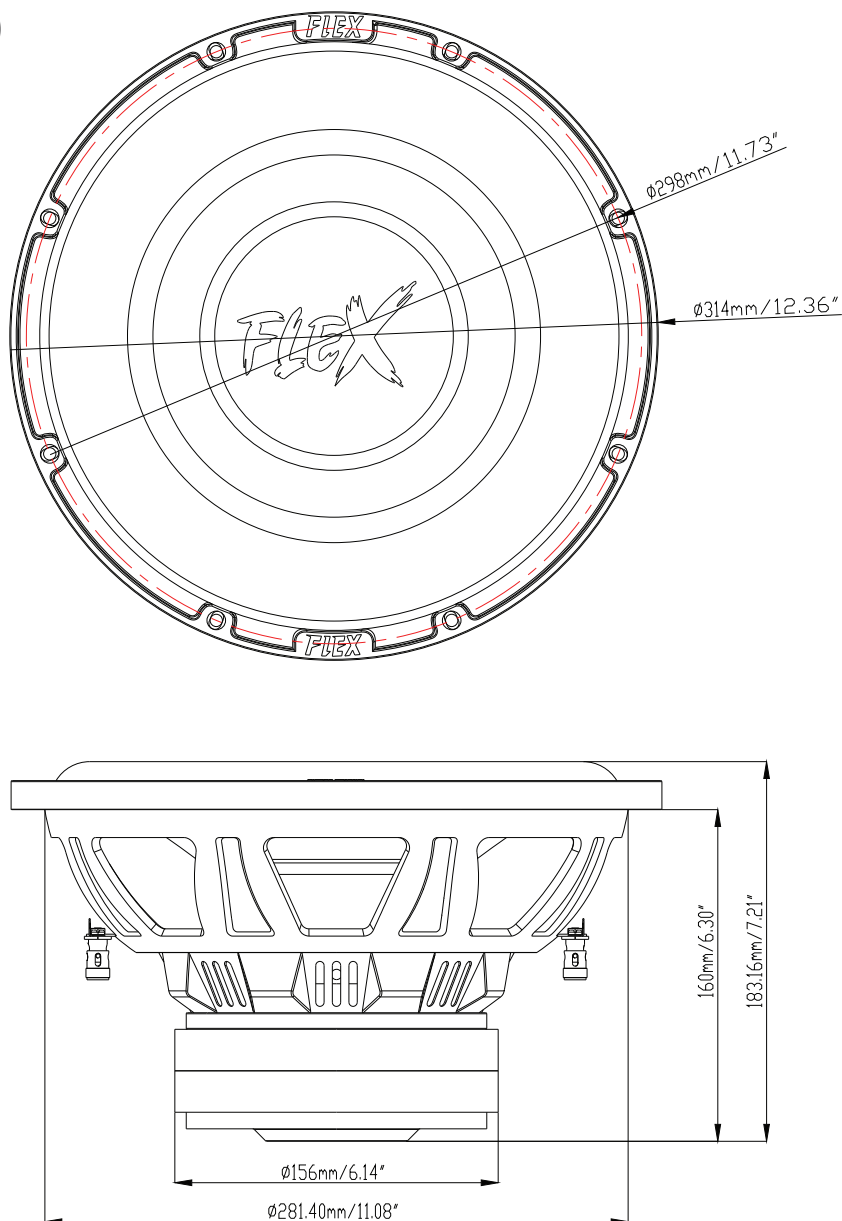

WARRANTY AND MAINTENANCE INFO

While the product is under warranty, defective parts will be repaired or replaced at the manufacturer's discretion. The defective product, along with notification about it, must be returned to the dealer from which it was purchased together with the warranty certificate duly filed in, complete with the original packaging. If the product is no longer under warranty, it will be repaired at the current costs.

INFORMATION ON DISPOSAL OF THE ELECTRICAL AND ELECTRONIC EQUIPMENT (FOR THE EUROPEAN COUNTRIES WITH SEPARATE WASTE COLLECTION)

Items marked "crisscrossed wheeled bin" are not allowed to be disposed of together with usual household waste. These electrical and electronic products should be disposed of in special reception centers, equipped for recycling such products and components. For information about the location of the nearest disposal/ recycling spot and the rules of delivery of waste please contact your local municipal office. Recycling and proper disposal helps to protect the environment and prevent harmful effects on health.

